


## FTTH Components

## Fiber Wall Socket

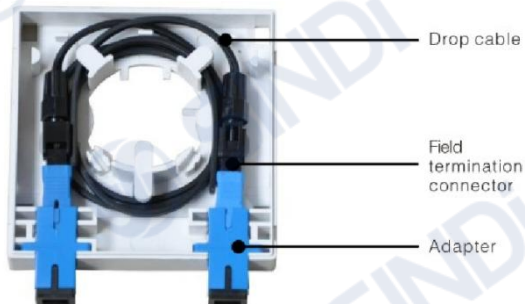

SINDi's Fiber Wall Socket is applicable to cable induction for every kind of user end such as FTTH, FTTO, FTTB, etc. Fiber Wall Socket shall be used to terminate the internal Fiber cable in the customer premise to a point ready for connection to an Optical Network Unit (ONU) both for Multi-Dwelling Unit (MDU) and Single Dwelling Unit (SDU).

### FEATURES

- Concise design, match all the decoration
- Two standard information sets, can accommodate two standard fiber optic adapters
- Fast installation with no glue or consumables
- High quality, high reliability and easy to install

Parameters	Conditions
Suitable cable	Indoor optical cable (3.1mm*2.0mm)
Suitable pigtail	∅ 0.9mm
Operating time	About 3 minutes
Average insertion loss	<0.5dB
Return loss	>50dB Room temperature
Tensile strength	>20N
Material	White ABS Flame retardant plastic
Adapter	SC type
Dimensions	86mm*86mm*22mm

### Configuration

No.	Name	specification	Unit	Quantity	Remark
1	Indoor SC Fiber Wall Socket	XDGCM-A	set	1	86mm*86mm*22mm
2	adapter	SC/PC or SC/APC	pc	1	One or both is alternative
3	SC fiber fast connector	XDQAC-SC/PC-A	set	1	One or both is alternative
		XDQAC-SC/APC-A	set	1	
4	Optical Fiber Cleaver	OFC-1	pc	1	alternative
5	Covered Fiber stripper(fiber patch)	CFS-2	pc	1	alternative
6	Covered wire stripper	PKBQ	pc	1	alternative
7	Red Laser Pen	FK-MT-7508 2.5MM	pc	1	alternative