


Passive Optical Components

Optical Fiber Assembly

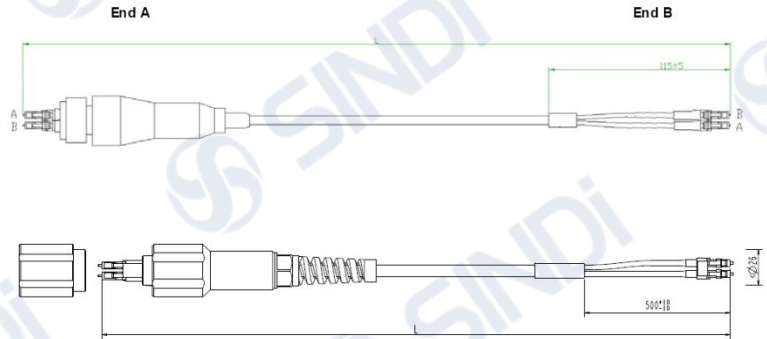

The theory of the outdoor cable assembly is same as that of the connectors. After stripping, through fan-out kit, the multi-core cable is divided into several bundle cables. Flexible metal tubing on the branched cables can improve the mechanical property and environmental suitability. The matched connectors could be customized. It is mainly used on the optical modules near the base stations.

FEATURES

- Optical fiber could choose single core ,dual-core or multi-core by customized;
- Branched Splitter is made of nylon with strong weather ability. It makes the branched optical cable good air-tightness and rain-proof function;
- G657A or customized type is usually used;
- Optical cable's jacket is made of LSZH material with smooth surface. And rat proof material is also used in the cable's jacket which could widely used at outdoor base station;
- Branched cable is protected by armor flexible metal tubing which could resist the damage of torsion, pull, pressure and rats.
- Surface shall be smooth, clean, no oil pollution and burr-free.It have to be good consistency with no scar and no crack. All parts assemble smoothly, connectors and adapters match smooth-going and easily when inserting in and pulling out.

Parameters	Conditions
Operating Temperature	-40℃~+80℃
Storage Temperature	-40℃~+80℃
Atmospheric Pressure	70Kpa~106Kpa
Operating Wavelength	1310nm, 1550nm
Insertion Loss	≤0.3dB
Return Loss	PC≥45dB UPC≥50dB APC≥60dB
Repeatability	≤0.2dB
Interchangeability	≤0.2dB

Be accordance with the national standard and communications standard